




ASG33 SEAM CONFIGURATIONS

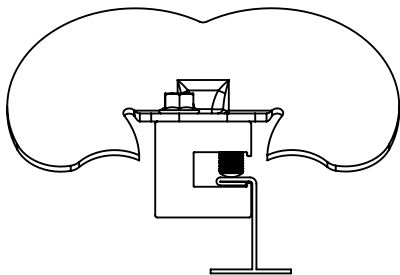


ASG33G-T-AL
Single Lock 5/8" or Greater Seam Width

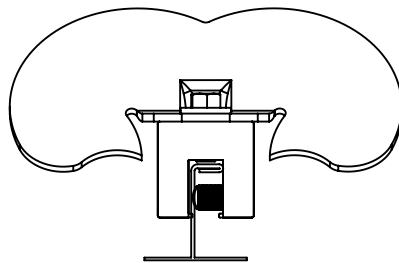


ASG33G-U-AL
Single Lock 1/2" or Less Seam Width

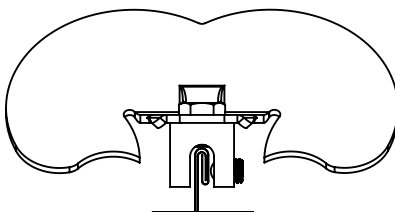


ASG33G-BR
Copper Double Lock

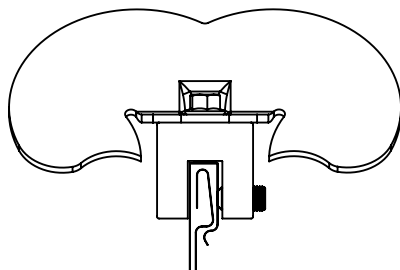


ASG33G-U-AL Milled
Snap Lock 7/16"-33/64" Seam Width

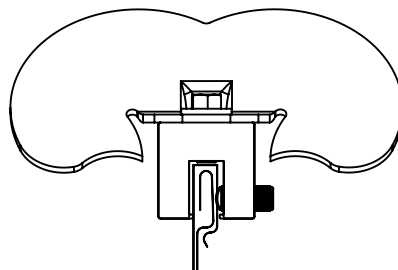


ASG33G-U-AL
Snap Lock 13/32" or Less Seam Width

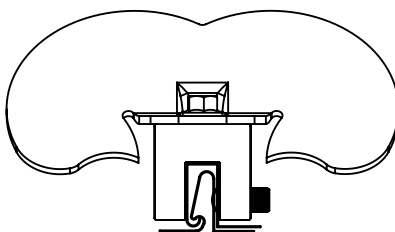

ASG33G-U-AL Milled
Vertical Nail Flange 33/64" or Less Seam Width

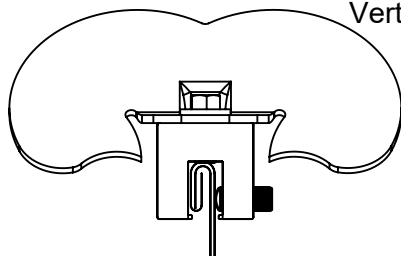

ASG33G-U-AL
Double Lock

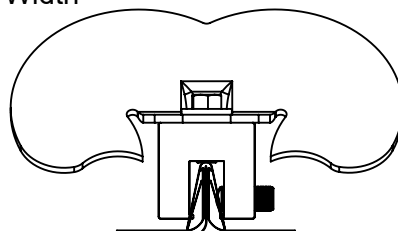

ASG33G-U-AL
Applied Batten Cap